Product

• Viteo wall mount basin set



Included Components

In wall valve

- Trim kit
- Spout

Features

- Polished chrome
- Metal body construction
- Ceramic disc valve
- Suitable for mains pressure
- KOHLER finishes resist tarnishing and corrosion

Kohler Code

8123A-4ND-CP




WELS RATING (5 Star 6 Litres / min)

Related Products

• Viteo tapware

Technical Details

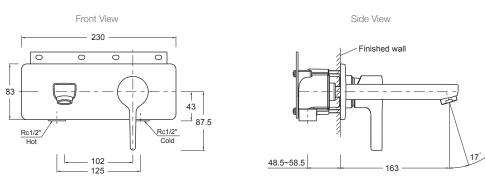

Installation Notes:

- Female Rc1/2" inlets.
- Optimum working pressure 300-500 kPa.
- Maximum hydrostatic pressure 800 kPa (This pressure may be exceeded only under test conditions).
- Maximum temperature 80°C.
- Where normal working pressure exceeds the maximum, pressure limiting valves should be installed.
- Inline filters should be used to protect tapware from debris that may be present within the plumbing.

Australia www.kohler.com.au New Zealand www.kohler.co.nz

Sizes are approximate. All measurements shown are in millimetres. July 2018 1182931-A04-G

