### **Product**

• Purist hob mount basin set - Lever handles

### Kohler Code 14406A-4\*

## **Included Components**

Concealed breech piece

#### **Features**

- Choice of 5 colours
- Metal construction
- 1/4 turn ceramic disc valves
- Suitable for mains pressure
- KOHLER finishes resist tarnishing and corrosion



WELS RATING (4 Star 7.2 Litres / min)

PVD Colour Options (Colour swatches indicative only)



14406A-4-CP - Polished Chrome



14406A-4-BV - Vibrant Brushed Bronze



14406A-4-BN - Vibrant Brushed Nickel



14406A-4-PGD - Vibrant Moderne Polished Gold





14406A-4-RGD - Vibrant Rose Gold

# **Related Products**

- Purist accessories
- Purist tapware

### **Technical Details**

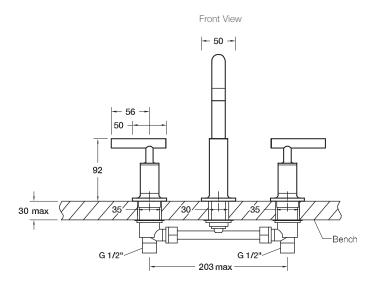



G½" is equal to BSP½"

# **Installation Notes:**

- G1/2" male inlets.
- Optimum working pressure 300-500 kPa.
- Maximum hydrostatic pressure 800 kPa (This pressure may be exceeded only under test conditions).
- Maximum temperature 80°C.
- Maximum bench thickness is 30mm.
- Where normal working pressure exceeds the maximum, pressure limiting valves should be installed.
- Inline filters should be used to protect tapware from debris that may be present within the plumbing.

